



2 sec = OFF

Transportation

User Manual:



www.wuerth.com

	LASER 2	
<small>IEC 60825-1:2014</small>	<small>λ=510-530nm Pmax<1mW tp=50-70µs</small>	

5709300041

Adolf Würth GmbH & Co. KG · Reinhold-Würth-Straße 12-17
74653 Künzelsau, GERMANY · www.wuerth.com

MWPSF-03/18

Adapter setup

Usable with wall mount

Usable with Receiver




QUICKSTART
CLG18

- Status LED
- Laser key
- Battery pack
- Window of vertical line
- Window of horizontal line
- Levelling lock
- Tripod thread 1/4"


Insert batteries/Li-Ion



1x - Laser on

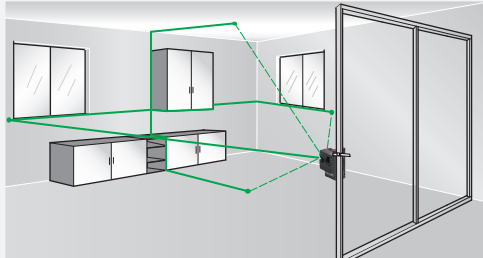


3x - Vertical mode

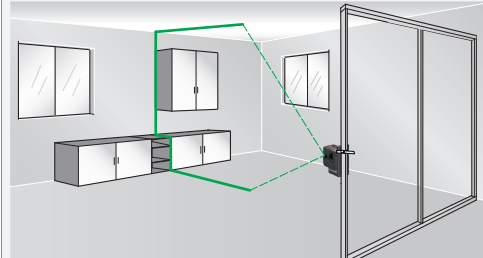


Charging Li-Ion battery




Self levelling / Levelling lock

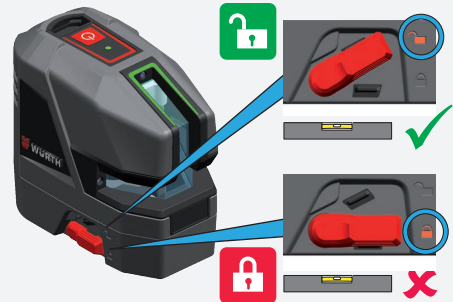

2x - Horizontal mode

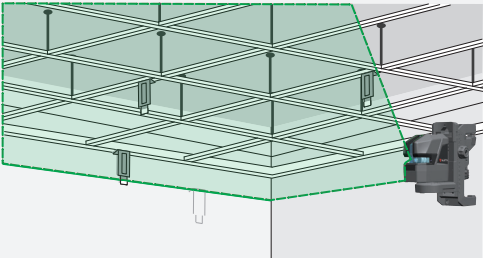

🔒 + 🔌 1x — + 🔌 1x |

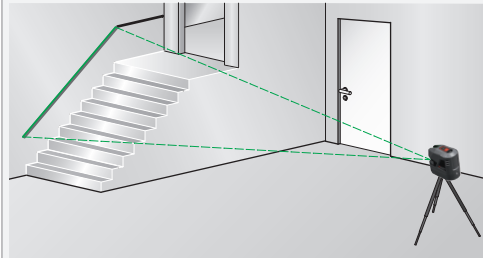

Status LED

